

wuxi NOVA PRECISION BEARING TECHNOLOGY CO., LTD

MOBILE:+008613701538557

EMAIL:ADMIN@NOVABEARING.COM

WEBSITE:HTTPS://WWW.NOVABEARING.COM



NOVA BEARING

ABOUT US

Nova bearing specializes in the production of precision miniature bearings with inner diameters ranging from 1 mm to 15 mm. We possess strong technical capabilities, with professional technical personnel accounting for 20% of our team. Our annual output reaches 30 million units, supporting stable mass production for global customers. We strictly follow the IATF 16949 automotive quality management system in the whole production process.

Our bearings feature high precision, long service life and low noise, making them ideal for high-end equipment and precision applications. Our products are widely sold to Southeast Asia, Europe, America and other international markets, and are highly recognized and trusted by clients worldwide.

Our Mission: To provide high-quality precision bearings and professional solutions for global customers.

Our Vision: To become a trusted long-term partner in the precision bearing industry.



CONTENTS

01 - Products Shows

02 - Why Choose Us

03 - Our Honers

04 - Industry Application

05 - Producing Workshop

06 - Test Facilities

07 - Bearing Production Process

MAIN PRODUCTS



604ZZ



625RS



625ZZ



626ZZ



635RS



635ZZ



684ZZ



686ZZ



688ZZ



688ZZ



695ZZ



696RS



696ZZ



698RS



698ZZ






MR83ZZ




NOVA BEARING



PRODUCTS

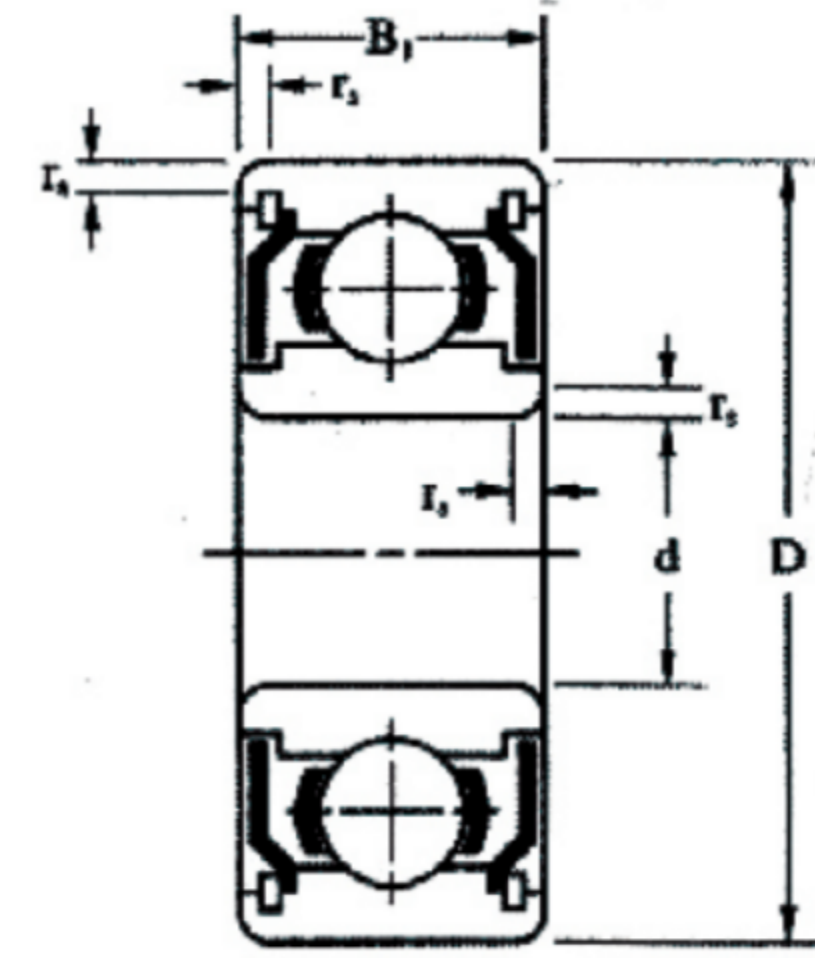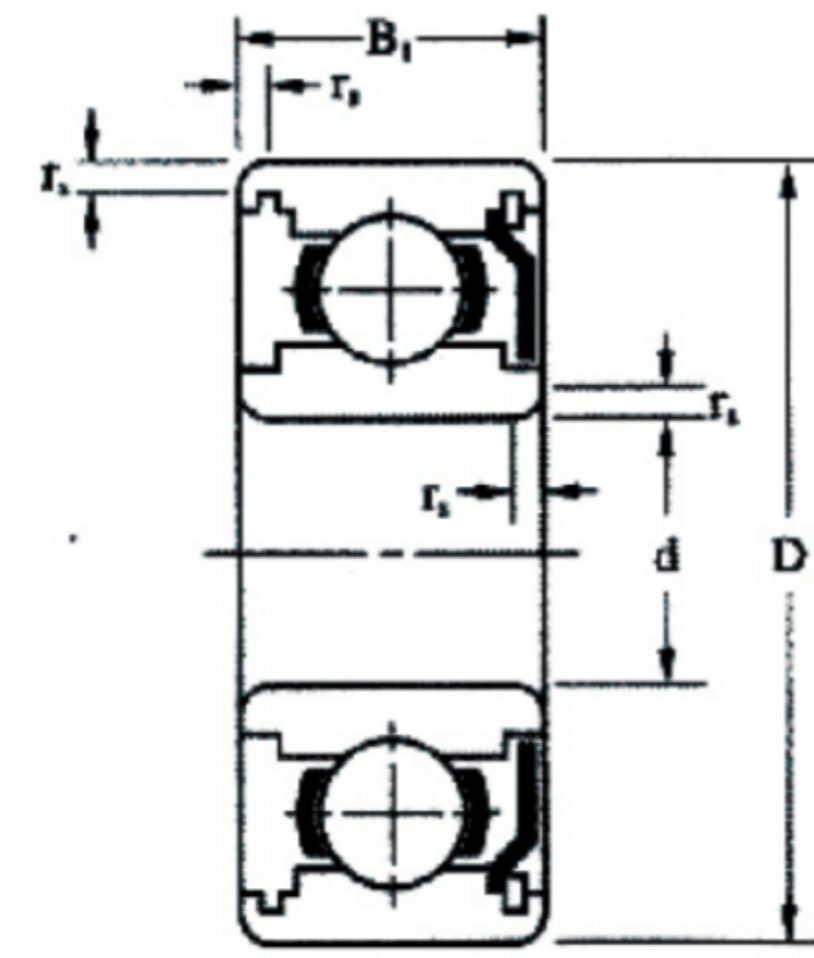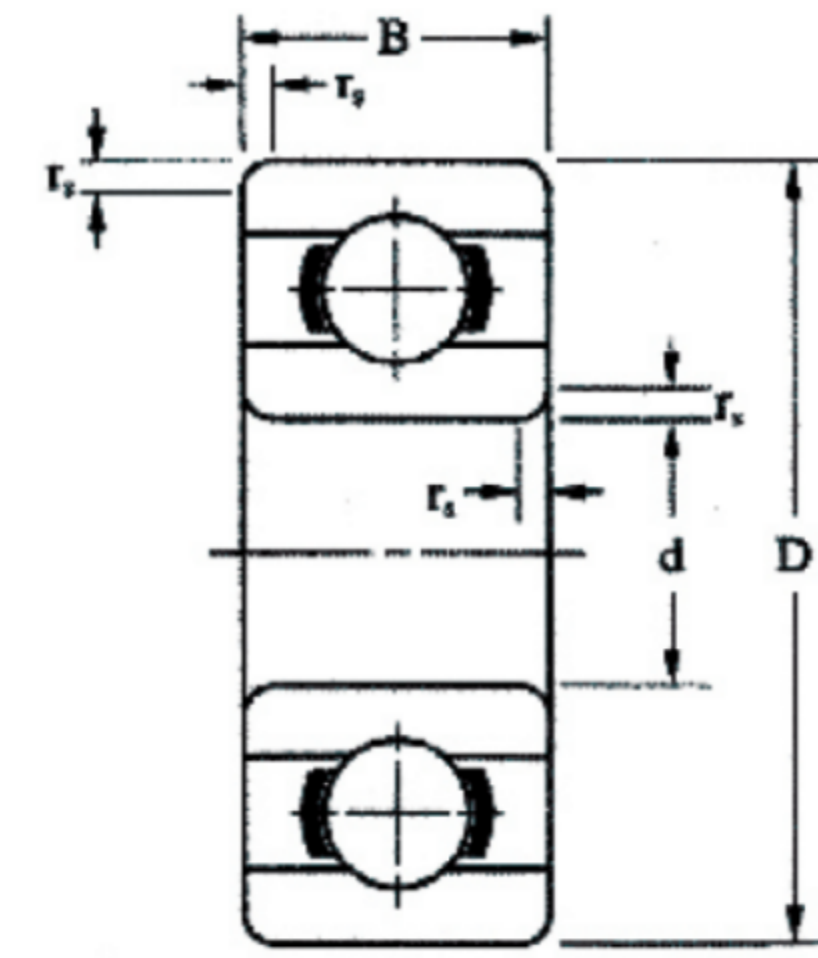







PRODUCTS

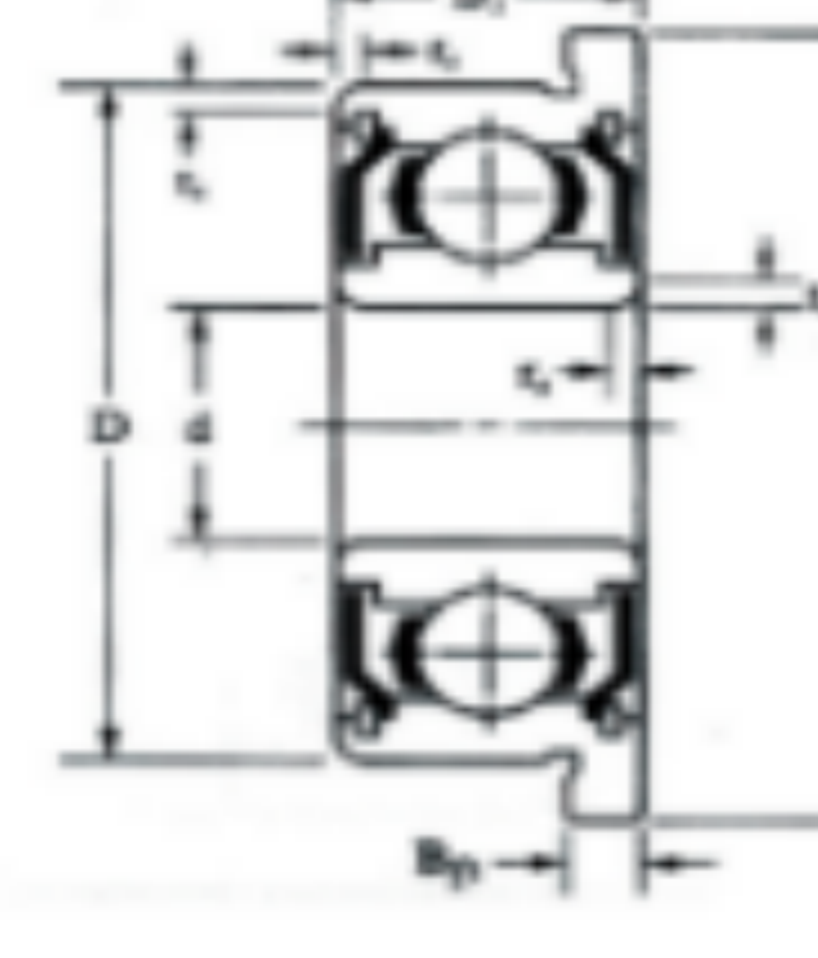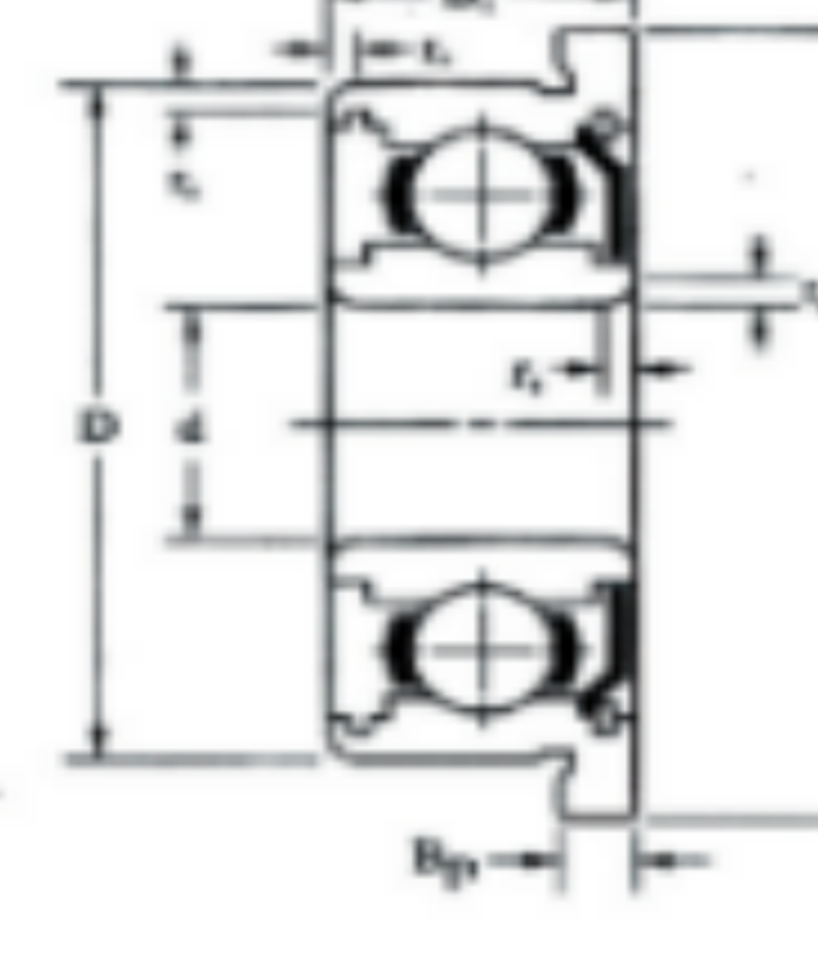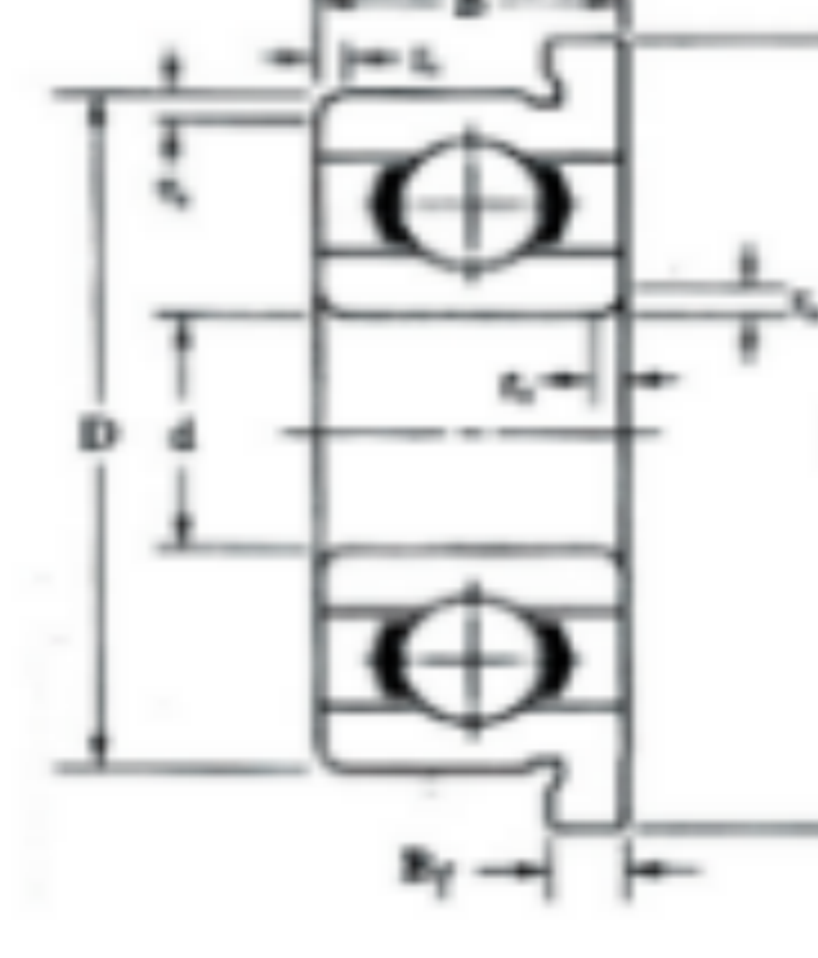

| inner d | | outer D | | flange outer D _f | | chamfer r _s (min) | | Open-type product | | | | closed-end product | | | | | | | | | | |
|---------|--------|---------|--------|-----------------------------|--------|------------------------------|-----------------------|-------------------|--------|-----------------------------|--------|--------------------|-------|-------------|----------|------------|--------|--------------------|---|--------------|-----|--------------------|
| | | | | | | | | width B | | flange width B _f | | model | | | | | | | | | | |
| | | | | | | | | | | | | open type | | flange open | | dust cover | | flanger dust cover | | sealing ring | | |
| mm | inch | mm | inch | mm | inch | mm | inch | mm | inch | mm | inch | MR85 | MF85 | - | - | MR85ZZ | MF85ZZ | - | - | 2RS | 2RU | TTS |
| 5.0 | 0.1969 | 8 | 0.3150 | 9.2 | 0.3622 | 0.10 | 0.0039 | 2.0 | 0.0787 | 0.6 | 0.0236 | - | - | - | - | - | - | - | - | - | - | - |
| | | 8 | 0.3150 | 9.2 | 0.3622 | 0.10 | 0.0039 | - | - | - | - | - | - | - | - | MR85ZZ | MF85ZZ | - | - | - | - | TTS |
| | | 9 | 0.3543 | 10.2 | 0.4016 | 0.15 | 0.0059 | 2.5 | 0.0984 | 0.6 | 0.0236 | MR95 | MF95 | MR95ZZS | MF95ZZS | - | - | - | - | - | - | TTS |
| | | 10 | 0.3937 | 11.2* | 0.4409 | 0.15 | 0.0059 | 3.0 | 0.1181 | 0.6 | 0.0236 | MR105 | MF105 | MR105ZZ | MF105ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 11 | 0.4331 | 12.6 | 0.4961 | 0.15 | 0.0059 | - | - | - | - | - | - | MR115ZZ | MF115ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 11 | 0.4331 | 12.5 | 0.4921 | 0.15 | 0.0059 | 3.0 | 0.1181 | 0.8 | 0.0315 | 685 | F685 | 685ZZ | F685ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 13 | 0.5118 | 15.0 | 0.5906 | 0.20 | 0.0079 | 4.0 | 0.1575 | 1.0 | 0.0394 | 695 | F695 | 695ZZ | F695ZZ | 2RS | 2RU | TTS ⁽⁴⁾ | - | - | - | - |
| | | 14 | 0.5512 | 16.0 | 0.6299 | 0.20 | 0.0079 | 5.0 | 0.1969 | 1.0 | 0.0394 | 605 | F605 | 605ZZ | F605ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 16 | 0.6299 | 18.0 | 0.7087 | 0.30 | 0.0118 | 5.0 | 0.1969 | 1.0 | 0.0394 | 625 | F625 | 625ZZ | F625ZZ | 2RS | 2RU | TTS | - | - | - | - |
| | | 19 | 0.7480 | 22.0 | 0.8661 | 0.30 | 0.0118 | 6.0 | 0.2362 | 1.5 | 0.0591 | 635 | F635 | 635ZZ | F635ZZ | 2RS | 2RU | - | - | - | - | - |
| | | | | | | 0.15 | 0.0059 | | | | | MR106 | MF106 | | | | | | | | | |
| 6.0 | 0.2362 | 10 | 0.3937 | 11.2 | 0.4409 | 0.10 | 0.0039 | 2.5 | 0.0984 | 0.6 | 0.0236 | | | MR106ZZ | MF106ZZ | - | - | - | - | - | - | TTS ⁽⁴⁾ |
| | | | | | | 0.20 | 0.0079 | | | | | MR126 | MF126 | | | | | | | | | |
| | | 12 | 0.4724 | 13.2* | 0.5197 | 0.15 | 0.0059 | 3.0 | 0.1181 | 0.6 | 0.0236 | | | MR126ZZ | MF126ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 13 | 0.5118 | 15.0 | 0.5906 | 0.15 | 0.0059 | 3.5 | 0.1378 | 1.0 | 0.0394 | 686 | F686 | 686ZZ | F686ZZ | 2RS | 2RU | TTS | - | - | - | - |
| | | 15 | 0.5906 | 17.0 | 0.6693 | 0.20 | 0.0079 | 5.0 | 0.1969 | 1.2 | 0.0472 | 696 | F696 | 696ZZ | F696ZZ | 2RS | 2RU | TTS | - | - | - | - |
| | | 16 | 0.6299 | - | - | 0.20 | 0.0079 | 5.0 | 0.1969 | - | - | - | - | 696AZZ | - | 2RS | 2RU | - | - | - | - | - |
| | | 17 | 0.6693 | 19.0 | 0.7480 | 0.30 | 0.0118 | 6.0 | 0.2362 | 1.2 | 0.0472 | 606 | F606 | 606ZZ | F606ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 19 | 0.7480 | 22.0 | 0.8661 | 0.30 | 0.0118 | 6.0 | 0.2362 | 1.5 | 0.0591 | 626 | F626 | 626ZZ | F626ZZ | 2RS | 2RU | TTS ⁽⁴⁾ | - | - | - | - |
| | | 22 | 0.8661 | - | - | 0.30 | 0.0118 | 7.0 | 0.2756 | - | - | 636 | - | 636ZZ | - | 2RS | 2RU | - | - | - | - | - |
| | | | | | | 0.15 | 0.0059 | | | | | MR117 | MF117 | | | | | | | | | |
| 7.0 | 0.2756 | 11 | 0.4331 | 12.2 | 0.4803 | 0.10 | 0.0039 | 2.5 | 0.0984 | 0.6 | 0.0236 | | | MR117ZZS | MF117ZZS | - | - | - | - | - | - | TTS |
| | | | | | | 0.20 | 0.0079 | | | | | MR137 | MF137 | | | | | | | | | |
| | | 13 | 0.5118 | 14.2* | 0.5591 | 0.15 | 0.0059 | 3.0 | 0.1181 | 0.6 | 0.0236 | | | MR137ZZ | MF137ZZ | - | - | - | - | - | - | TTS |
| | | 14 | 0.5512 | 16.0 | 0.6299 | 0.15 | 0.0059 | 3.5 | 0.1378 | 1.0 | 0.0394 | 687 | F687 | 687ZZ | F687ZZ | 2RS | 2RU | TTS | - | - | - | - |
| | | 17 | 0.6693 | 19.0 | 0.7480 | 0.30 | 0.0118 | 5.0 | 0.1969 | 1.2 | 0.0472 | 697 | F697 | 697ZZ | F697ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 19 | 0.7480 | 22.0 | 0.8661 | 0.30 | 0.0118 | 6.0 | 0.2362 | 1.5 | 0.0591 | 607 | F607 | 607ZZ | F607ZZ | 2RS | 2RU | TTS ⁽⁴⁾ | - | - | - | - |
| | | 22 | 0.8661 | 25.0 | 0.9843 | 0.30 | 0.0118 | 7.0 | 0.2756 | 1.5 | 0.0591 | 627 | F627 | 627ZZ | F627ZZ | 2RS | 2RU | TTS | - | - | - | - |
| | | 26 | 1.0236 | - | - | 0.30 | 0.0118 | 9.0 | 0.3543 | - | - | 637 | - | 637ZZ | - | 2RS | 2RU | - | - | - | - | - |
| | | | | | | 0.15 | 0.0059 | | | | | MR128 | MF128 | | | | | | | | | |
| 8.0 | 0.3150 | 12 | 0.4724 | 13.2* | 0.5197 | 0.10 | 0.0039 | 2.5 | 0.0984 | 0.6 | 0.0236 | | | MR128ZZ | MF128ZZ | - | - | - | - | - | - | TTS |
| | | | | | | 0.20 | 0.0079 | | | | | MR148 | MF148 | | | | | | | | | |
| | | 14 | 0.5512 | 15.6 | 0.6142 | 0.15 | 0.0059 | 3.5 | 0.1378 | 0.8 | 0.0315 | | | MR148ZZ | MF148ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 16 | 0.6299 | 18.0 | 0.7087 | 0.20 | 0.0079 | 4.0 | 0.1575 | 1.0 | 0.0394 | 688 | F688 | 688ZZ | F688ZZ | 2RS | 2RU | TTS | - | - | - | - |
| | | 19 | 0.7480 | 22.0 | 0.8661 | 0.30 | 0.0118 | 6.0 | 0.2362 | 1.5 | 0.0591 | 698 | F698 | 698ZZ | F698ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 22 | 0.8661 | 25.0 | 0.9843 | 0.30 | 0.0118 | 7.0 | 0.2756 | 1.5 | 0.0591 | 608 | F608 | 608ZZ | F608ZZ | 2RS | 2RU | TTS | - | - | - | - |
| | | 24 | 0.9449 | - | - | 0.30 | 0.0118 | 8.0 | 0.3150 | - | - | 628 | - | 628ZZ | - | 2RS | 2RU | - | - | - | - | - |
| | | 28 | 1.1024 | - | - | 0.30 | 0.0118 | 9.0 | 0.3543 | - | - | 638 | - | 638ZZ | - | 2RS | 2RU | - | - | - | - | - |
| | | | | | | 0.15 | 0.0039 | | | | | 679 | F679 | 679ZZS | F679ZZS | - | - | - | - | - | - | - |
| 9.0 | 0.3543 | 14 | 0.5512 | 15.5 | 0.6102 | 0.10 | 0.0039 | 3.0 | 0.1181 | 0.8 | 0.0315 | | | | | | | | | | | TTS |
| | | 17 | 0.6693 | 19.0 | 0.7480 | 0.20 | 0.0079 | 4.0 | 0.1575 | 1.0 | 0.0394 | 689 | F689 | 689ZZ | F689ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 20 | 0.7874 | 23.0 | 0.9055 | 0.30 | 0.0118 | 6.0 | 0.2362 | 1.5 | 0.0591 | 699 | F699 | 699ZZ | F699ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 24 | 0.9449 | 27.0 | 1.0630 | 0.30 | 0.0118 | 7.0 | 0.2756 | 1.5 | 0.0591 | 609 | F609 | 609ZZ | F609ZZ | 2RS | 2RU | - | - | - | - | - |
| | | 26 | 1.0236 | - | - | 0.60 ⁽⁵⁾ | 0.0236 ⁽⁵⁾ | 8.0 | 0.3150 | - | - | 629 | - | 629ZZ | - | 2RS | 2RU | - | - | - | - | - |
| | | 30 | 1.1811 | - | - | 0.60 | 0.0236 | 10.0 | 0.3937 | - | - | 639 | - | 639ZZ | - | 2RS | 2RU | - | - | - | - | - |

| with B ₁ | | flange with | | load rated | | Max allowable rotation number | | Type of protective frame | steel ball | | weight | | |
|---------------------|--------|-------------|--------|--------------------------|-------------------------|-------------------------------|------|--------------------------|------------|----------|-----------|------------------|--------------|
| | | | | basic dynamic load rated | basic rated static load | grease | lube | | unit | diameter | open type | flange open type | sealing ring |
| mm | inch | mm | inch | Cr(N) | Cor(N) | X1000rpm | | pcs. | mm | inch | g | | |
| - | - | - | - | 308 | 120 | 53 | 63 | W | 8 | 1.000 | 0.0394 | 0.25 | 0.33 |
| 2.5 | 0.0984 | 0.6 | 0.0236 | 218 | 90 | 53 | 63 | W | 9 | 0.800 | 0.0315 | - | 0.34 |
| 3.0 | 0.1181 | 0.6 | 0.0236 | 431 | 169 | 50 | 60 | W | 8 | 1.200 | 0.0472 | 0.54 | 0.62 |
| 4.0 | 0.1575 | 0.8 | 0.0315 | 431 | 169 | 50 | 60 | W | 8 | 1.200 | 0.0472 | 0.91 | 1.00 |
| 4.0 | 0.1575 | 0.8 | 0.0315 | 716 | 282 | 45 | 53 | J | 8 | 1.588 | 0.0625 | - | 0.62 |
| 5.0 | 0.1969 | 1.0 | 0.0394 | 716 | 282 | 45 | 53 | J,TW | 8 | 1.588 | 0.0625 | 1.16 | 1.33 |
| 4.0 | 0.1575 | 1.0 | 0.0394 | 1077 | 432 | 43 | 50 | J | 8 | 2.000 | 0.0787 | 2.39 | 2.73 |
| 5.0 | 0.1969 | 1.0 | 0.0394 | 1329 | 507 | 40 | 50 | J,TW | 7 | 2.381 | 0.0937 | 3.46 | 3.83 |
| 5.0 | 0.1969 | 1.0 | 0.0394 | 1729 | 675 | 36 | 43 | J,TW | 7 | 2.778 | 0.1094 | 4.95 | 5.37 |
| 6.0 | 0.2362 | 1.5 | 0.0591 | 2336 | 896 | 32 | 40 | J,TW | 6 | 3.500 | 0.1378 | 8.50 | 9.26 |
| | | | | | | | | | | | | | |
| 3.0 | 0.1181 | 0.6 | 0.0236 | 496 | 218 | 45 | 53 | W | 10 | 1.200 | 0.0472 | 0.55 | 0.64 |
| 4.0 | 0.1575 | 0.8 | 0.0315 | 716 | 295 | 43 | 50 | W,J,TW | 8 | 1.588 | 0.0625 | 1.25 | 1.44 |
| 5.0 | 0.1969 | 1.1 | 0.0433 | 1082 | 442 | 40 | 50 | J,TW | 8 | 2.000 | 0.0787 | 1.87 | 2.21 |
| 5.0 | 0.1969 | 1.2 | 0.0472 | 1340 | 523 | 40 | 45 | J | 7 | 2.381 | 0.0937 | 3.85 | 4.24 |
| 5.0 | 0.1969 | - | - | 1340 | 523 | 40 | 45 | J | 7 | 2.381 | 0.0937 | - | 4.59 |
| 6.0 | 0.2362 | 1.2 | 0.0472 | 2263 | 846 | 38 | 45 | J | 6 | 3.500 | 0.1378 | 5.94 | 6.47 |
| 6.0 | 0.2362 | 1.5 | 0.0591 | 2336 | 896 | 32 | 4 | | | | | | |

PRODUCTS

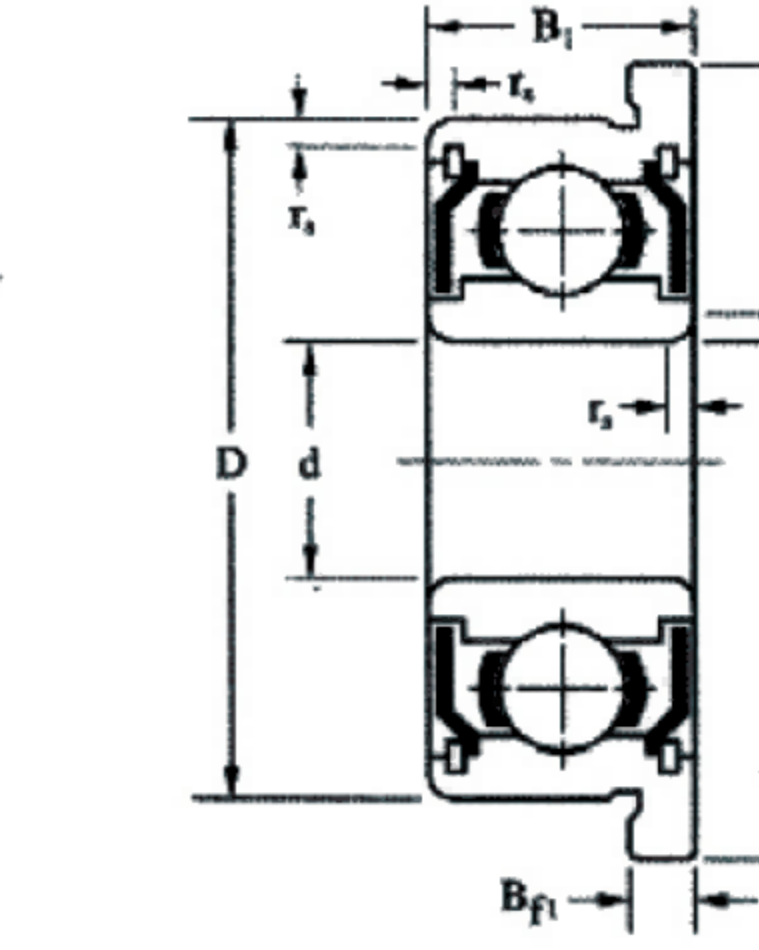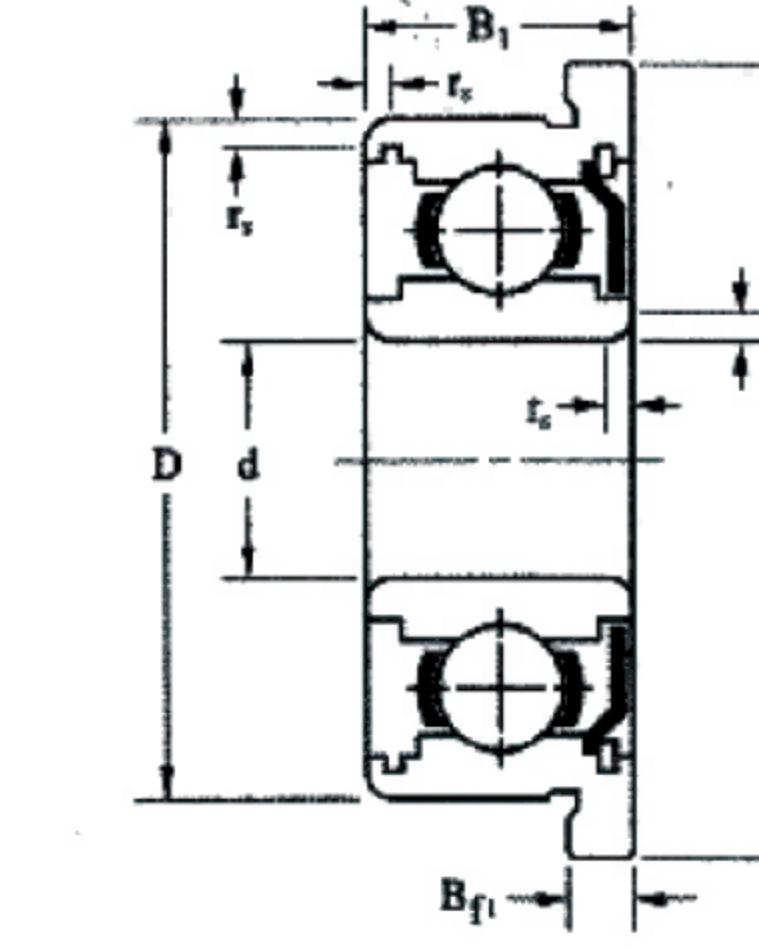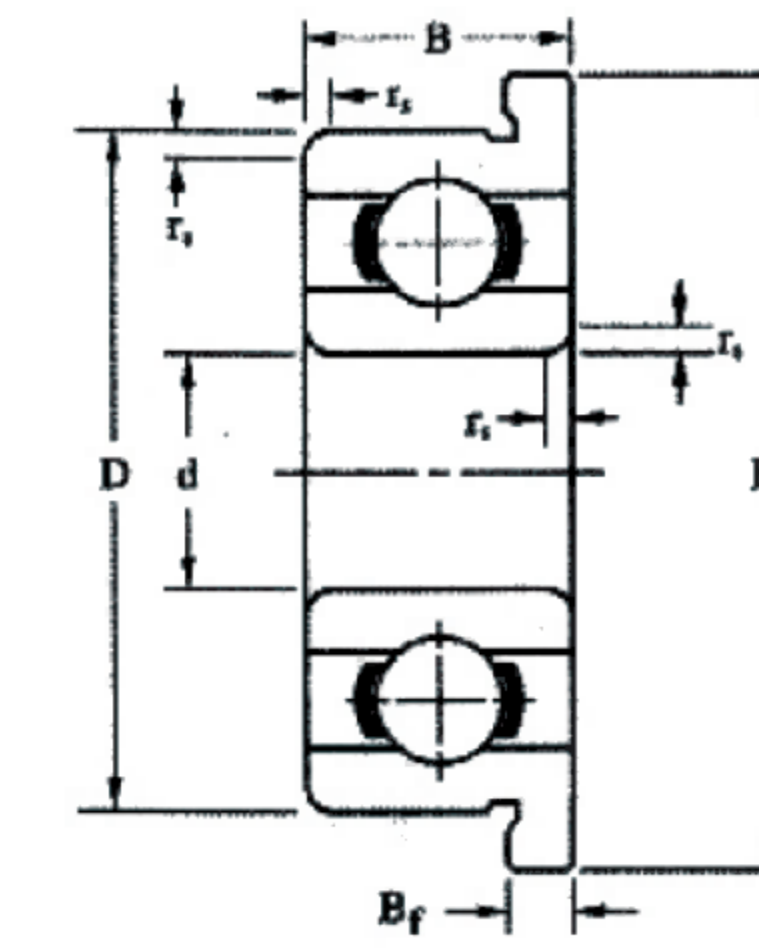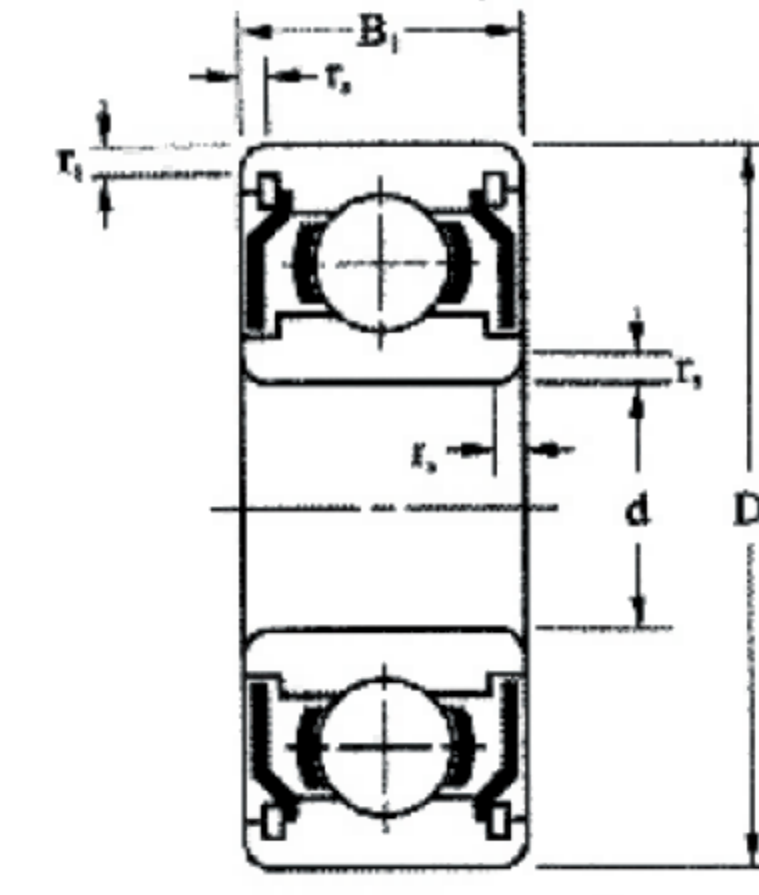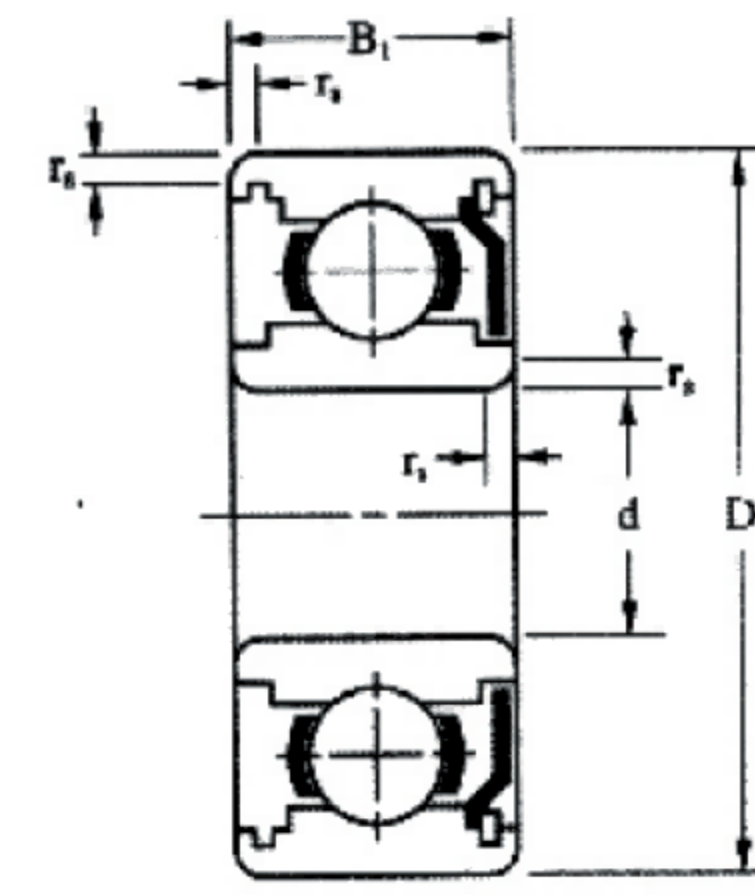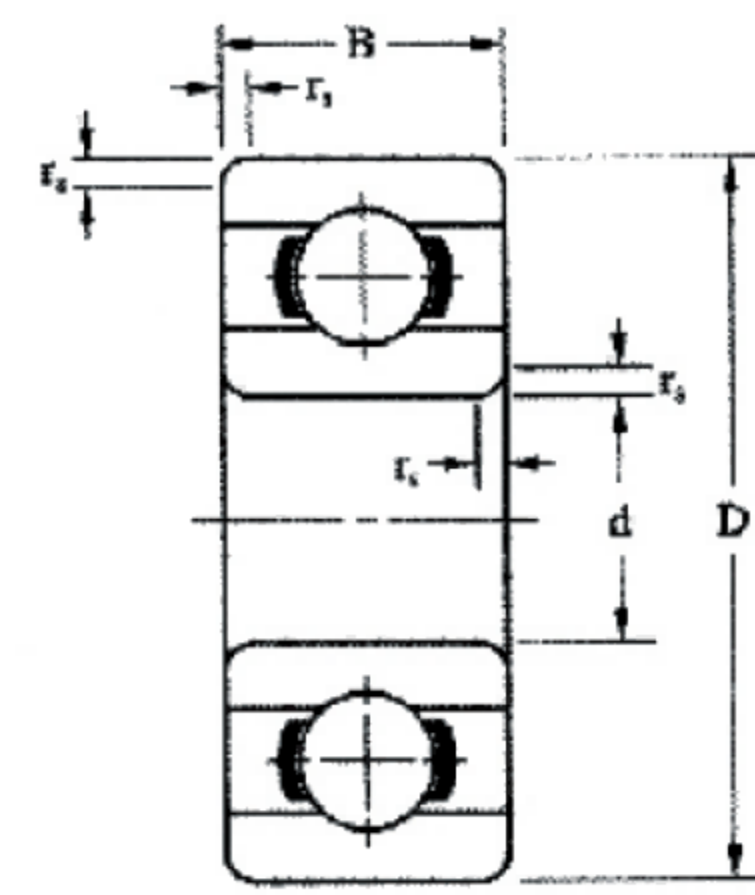

PRODUCTS

| inner d | | outer D | | flange outer D _f | | rs(min) | | open type products | | | | | | closed type products | | | | | |
|---------|--------|---------|--------|-----------------------------|--------|---------|--------|--------------------|--------|----------------|--------|-----------|------------------|----------------------|-------------------|-------|-----|-------------------|--|
| | | | | | | | | B | | B _f | | type | | | | model | | | |
| mm | inch | mm | inch | mm | inch | mm | inch | mm | inch | mm | inch | open type | flange open type | dust cover | flange dust cover | 2RS | 2RU | TTS | |
| 0.6 | 0.0236 | 2.5 | 0.0984 | - | - | 0.05 | 0.0020 | 1.0 | 0.0394 | - | - | 68/0.6 | - | - | - | - | - | - | |
| 1.0 | 0.0394 | 3 | 0.1181 | 3.8 | 0.1496 | 0.05 | 0.0020 | 1.0 | 0.0394 | 0.3 | 0.0118 | 681 | F681 | - | - | - | - | - | |
| | | 3 | 0.1181 | - | - | 0.05 | 0.0020 | 1.5 | 0.0591 | - | - | MR31 | - | - | - | - | - | - | |
| | | 4 | 0.1575 | 5.0 | 0.1969 | 0.10 | 0.0039 | 1.6 | 0.0630 | 0.5 | 0.0197 | 691 | F691 | - | - | - | - | - | |
| 1.2 | 0.0472 | 4 | 0.1575 | 4.8 | 0.1890 | 0.10 | 0.0039 | 1.8 | 0.0709 | 0.4 | 0.0157 | MR41X | MF41X | MR41XZZ | - | - | - | - | |
| 1.5 | 0.0591 | 4 | 0.1575 | 5.0 | 0.1969 | 0.05 | 0.0020 | 1.2 | 0.0472 | 0.4 | 0.0157 | 681X | F681X | 681XZZ | F681XZZ | - | - | - | |
| | | 5 | 0.1969 | 6.5 | 0.2559 | 0.15 | 0.0059 | 2.0 | 0.0787 | 0.6 | 0.0236 | 691X | F691X | 691XZZ | F691XZZ | - | - | - | |
| | | 6 | 0.2362 | 7.5 | 0.2953 | 0.15 | 0.0059 | 2.5 | 0.0984 | 0.6 | 0.0236 | 601X | F601X | 601XZZ | F601XZZ | - | - | - | |
| 2.0 | 0.0787 | 4 | 0.1575 | - | - | 0.05 | 0.0020 | 1.2 | 0.0472 | - | - | 672 | - | 672ZZ | - | - | - | - | |
| | | 5 | 0.1969 | 6.1 | 0.2402 | 0.08 | 0.0031 | 1.5 | 0.0591 | 0.5 | 0.0197 | 682 | F682 | 682ZZ | F682ZZ | - | - | - | |
| | | 5 | 0.1969 | 6.2 | 0.2441 | 0.10 | 0.0039 | 2.0 | 0.0787 | 0.6 | 0.0236 | MR52 | MF52 | MR52ZZ | MF52ZZ | - | - | - | |
| | | 6 | 0.2362 | 7.5 | 0.2953 | 0.15 | 0.0059 | 2.3 | 0.0906 | 0.6 | 0.0236 | 692 | F692 | 692ZZ | F692ZZ | - | - | TTS | |
| | | 6 | 0.2362 | 7.2 | 0.2853 | 0.15 | 0.0059 | 2.5 | 0.0984 | 0.6 | 0.0236 | MR62 | MF62 | MR62ZZ | - | - | - | - | |
| | | 7 | 0.2756 | 8.2 | 0.3228 | 0.15 | 0.0059 | 2.5 | 0.0984 | 0.6 | 0.0236 | MR72 | MF72 | MR72ZZS | MF72ZZS | - | - | TTS | |
| | | 7 | 0.2756 | 8.5 | 0.3346 | 0.15 | 0.0059 | 2.8 | 0.1102 | 0.7 | 0.0276 | 602 | F602 | 602ZZS | F602ZZS | - | - | TTS | |
| 2.5 | 0.0984 | 6 | 0.2362 | 7.1 | 0.2795 | 0.08 | 0.0031 | 1.8 | 0.0709 | 0.5 | 0.0197 | 682X | F682X | 682XZZ | F682XZZ | - | - | - | |
| | | 7 | 0.2756 | 8.5 | 0.3346 | 0.15 | 0.0059 | 2.5 | 0.0984 | 0.7 | 0.0276 | 692X | F692X | 692XZZS | F692XZZS | - | - | TTS | |
| | | 8 | 0.3150 | 9.2 | 0.3622 | 0.20 | 0.0079 | 2.5 | 0.0984 | 0.6 | 0.0236 | MR82X | MF82X | - | - | - | - | - | |
| | | 8 | 0.3150 | 9.5 | 0.3740 | 0.15 | 0.0059 | 2.8 | 0.1102 | 0.7 | 0.0276 | 602X | F602X | 602XZZ | F602X | - | - | - | |
| 3.0 | 0.1181 | 6 | 0.2362 | 7.2 | 0.2835 | 0.10 | 0.0039 | 2.0 | 0.0787 | 0.6 | 0.0236 | MR63 | MF63 | MR63ZZ | MF63ZZ | - | - | - | |
| | | 7 | 0.2756 | 8.1 | 0.3189 | 0.10 | 0.0039 | 2.0 | 0.0787 | 0.5 | 0.0197 | 683 | F683 | 683ZZ | F683ZZ | - | - | TTS ⁴⁾ | |
| | | 8 | 0.3150 | 9.2 | 0.3622 | 0.15 | 0.0059 | 2.5 | 0.0984 | 0.6 | 0.0236 | MR83 | MF83 | MR83ZZ | - | - | - | - | |
| | | 8 | 0.3150 | 9.5 | 0.3740 | 0.15 | 0.0059 | 3.0 | 0.1181 | 0.7 | 0.0276 | 693 | F693 | 693ZZ | F693ZZ | 2RS | - | - | |
| | | 9 | 0.3543 | 10.2 | 0.4016 | 0.20 | 0.0079 | 2.5 | 0.0984 | 0.6 | 0.0236 | MR93 | MF93 | MR93ZZ | MF93ZZ | - | - | - | |
| | | 9 | 0.3543 | 10.5 | 0.4134 | 0.15 | 0.0059 | 3.0 | 0.1181 | 0.7 | 0.0276 | 603 | F603 | 603ZZ | F603ZZ | - | - | - | |
| | | 10 | 0.3937 | 11.5 | 0.5428 | 0.15 | 0.0059 | 4.0 | 0.1575 | 1.0 | 0.0394 | 623 | F623 | 623ZZ | F623ZZ | 2RS | 2RU | - | |
| | | 13 | 0.5118 | - | - | 0.20 | 0.0079 | 5.0 | 0.1969 | - | - | 633 | - | 633ZZ | - | 2RS | 2RU | - | |
| 4.0 | 0.1575 | 7 | 0.2756 | 8.2 | 0.3228 | 0.10 | 0.0039 | 2.0 | 0.0787 | 0.6 | 0.0236 | MR74 | MF74 | - | - | - | - | - | |
| | | 7 | 0.2756 | 8.2 | 0.3228 | 0.10 | 0.0039 | - | - | - | - | - | - | MR74ZZ | MF74ZZ | - | - | - | |
| | | | | | | 0.15 | 0.0059 | | | | | MR84 | MF84 | - | - | - | - | - | |
| | | 8 | 0.3150 | 9.2 | 0.3622 | 0.10 | 0.0039 | 2.0 | 0.0787 | 0.6 | 0.0236 | | | MR84ZZ | MF84ZZ | - | - | - | |
| | | 9 | 0.3543 | 10.3 | 0.4055 | 0.10 | 0.0039 | 2.5 | 0.0984 | 0.6 | 0.0236 | 684 | F684 | 684ZZ | F684ZZ | 2RS | 2RU | TTS | |
| | | | | | | 0.20 | 0.0079 | | | | | MR104 | MF104 | - | - | - | - | - | |
| | | 10 | 0.3937 | 11.2 | 0.4409 | 0.15 | 0.0059 | 3.0 | 0.1181 | 0.6 | 0.0236 | | | MR104ZZ | MF104ZZ | 2RS | 2RU | - | |
| | | 11 | 0.4331 | 12.5 | 0.4921 | 0.15 | 0.0059 | 4.0 | 0.1575 | 1.0 | 0.0394 | 694 | F694 | 694ZZ | F694ZZ | 2RS | 2RU | - | |
| | | 12 | 0.4724 | 13.5 | 0.5315 | 0.20 | 0.0079 | 4.0 | 0.1575 | 1.0 | 0.0394 | 604 | F604 | 604ZZ | F604ZZ | 2RS | 2RU | - | |
| | | 13 | 0.5118 | 15.0 | 0.5906 | 0.20 | 0.0079 | 5.0 | 0.1969 | 1.0 | 0.0394 | 624 | F624 | 624ZZ | F624ZZ | 2RS | 2RU | - | |
| | | 16 | 0.6299 | 18.0 | 0.7087 | 0.30 | 0.0118 | 5.0 | 0.1969 | 1.0 | 0.0394 | 634 | F634 | 634ZZ | F634ZZ | 2RS | 2RU | TTS | |

| with B _i | | flange with B _{fi} | | rated load | | Max allowable rotation number | | Type of protective frame | steel ball | | weight | | | | |
|---------------------|--------|-----------------------------|--------|--------------------------|-------------------------|-------------------------------|------|--------------------------|------------|----------|-----------|------------------|------------|-------------------|------|
| | | | | basic rated dynamic load | basic rated static load | grease | lube | | unit | diameter | open type | flange open type | dust cover | flange dust cover | |
| mm | inch | mm | inch | Cr(N) | Cor(N) | X1000rpm | | pcs. | mm | inch | g | | | | |
| - | - | - | - | 68 | 16 | 142 | 160 | W | 5 | 0.500 | 0.0197 | 0.02 | - | - | - |
| - | - | - | - | 96 | 26 | 130 | 150 | W | 6 | 0.600 | 0.0236 | 0.03 | 0.04 | - | - |
| - | - | - | - | 96 | 26 | 130 | 150 | W | 6 | 0.600 | 0.0236 | 0.05 | - | - | - |
| - | - | - | - | 141 | 37 | 100 | 120 | W | 5 | 0.800 | 0.0315 | 0.11 | 0.14 | - | - |
| 2.5 | 0.0984 | - | - | 112 | 33 | 110 | 130 | W | 7 | 0.600 | 0.0236 | 0.10 | 0.12 | 0.14 | - |
| 2.0 | 0.0787 | 0.6 | 0.0236 | 112 | 33 | 100 | 120 | W | 7 | 0.600 | 0.0236 | 0.10 | 0.12 | 0.14 | 0.17 |
| 2.6 | 0.1024 | 0.8 | 0.0315 | 169 | 50 | 85 | 100 | W | 6 | 1.000 | 0.0394 | 0.20 | 0.26 | 0.25 | 0.33 |
| 3.0 | 0.1181 | 0.8 | 0.0315 | 330 | 99 | 75 | 90 | W | 6 | 1.200 | 0.0472 | 0.31 | 0.38 | 0.40 | 0.50 |
| 2.0 | 0.0787 | - | - | 124 | 40 | 91 | 104 | W | 8 | 0.600 | 0.0236 | 0.05 | - | 0.07 | - |
| 2.3 | 0.0906 | 0.6 | 0.0236 | 169 | 50 | 85 | 100 | W | 6 | 0.800 | 0.0315 | 0.15 | 0.19 | 0.20 | 0.24 |
| 2.5 | 0.0984 | 0.6 | 0.0236 | 169 | 50 | 85 | 100 | W | 6 | 0.800 | 0.0315 | 0.14 | 0.19 | 0.20 | 0.25 |
| 3.0 | 0.1181 | 0.8 | 0.0315 | 330 | 99 | 75 | 90 | W,J,TW | 6 | 1.200 | 0.0472 | 0.28 | 0.35 | 0.35 | 0.45 |
| 2.5 | 0.0984 | - | - | 330 | 99 | 75 | 90 | W,J | 6 | 1.200 | 0.0472 | 0.28 | 0.34 | 0.33 | - |
| 3.0 | 0.1181 | 0.6 | 0.0236 | 386 | 129 | 63 | 75 | W | 7 | 1.200 | 0.0472 | 0.43 | 0.50 | 0.53 | 0.60 |
| 3.5 | 0.1378 | 0.9 | 0.0354 | 386 | 129 | 60 | 71 | W | 7 | 1.200 | 0.0472 | 0.50 | 0.60 | 0.60 | 0.73 |
| 2.6 | 0.1024 | 0.8 | 0.0315 | 209 | 74 | 71 | 80 | W | 8 | 0.800 | 0.0315 | 0.20 | 0.24 | 0.35 | 0.42 |
| 3.5 | 0.1378 | 0.9 | 0.0354 | 386 | 129 | 63 | 75 | W | 7 | 1.200 | 0.0472 | 0.40 | 0.50 | 0.55 | 0.68 |
| - | - | - | - | 558 | 180 | 60 | 67 | W | 6 | 1.588 | 0.0625 | 0.52 | 0.60 | - | - |
| 4.0 | 0.1575 | 0.9 | 0.0354 | 552 | 177 | 60 | 71 | W | 6 | 1.588 | 0.0625 | 0.61 | 0.72 | 0.85 | 0.99 |
| 2.5 | 0.0984 | 0.6 | 0.0236 | 209 | 74 | 71 | 80 | W | 8 | 0.800 | 0.0315 | 0.20 | 0.26 | 0.28 | 0.34 |
| 3.0 | 0.1181 | 0.8 | 0.0315 | 311 | 112 | 63 | 75 | W | 8 | 1.000 | 0.0394 | 0.32 | 0.37 | 0.45 | 0.53 |
| 3.0 | 0.1181 | - | - | 395 | 141 | 60 | 67 | J | 7 | 1.200 | 0.0472 | 0.51 | 0.59 | 0.67 | - |
| 4.0 | 0.1575 | 0.9 | 0.0354 | 558 | 180 | 60 | 67 | W,J,TW | 6 | 1.588 | 0.0625 | 0.60 | 0.71 | 0.80 | 0.94 |
| 4.0 | 0.1575 | 0.8 | 0.0315 | 571 | 189 | 56 | 67 | W | 6 | 1.588 | 0.0625 | 0.75 | 0.83 | 1.15 | 1.30 |
| 5.0 | 0.1969 | 1.0 | 0.0394 | 571 | 189 | 56 | 67 | W | 6 | 1.588 | 0.0625 | 0.84 | 0.96 | 1.13 | 1.61 |
| 4.0 | 0.1575 | 1.0 | 0.0394 | 631 | 219 | 50 | 60 | J,TW | 7 | 1.588 | 0.0625 | 1.45 | 1.65 | 1.65 | 1.85 |
| 5.0 | 0.1969 | - | - | 1301 | 488 | 40 | 48 | J | 7 | 2.381 | 0.0937 | 3.27 | - | 3.43 | - |
| - | - | - | - | 311 | 115 | 60 | 67 | W | 8 | 1.000 | 0.0394 | 0.23 | 0.30 | - | - |
| 2.5 | 0.0984 | 0.6 | 0.0236 | 255 | 108 | 60 | 67 | W | 11 | 0.800 | 0.0315 | - | - | 0.33 | 0.40 |
| 3.0 | | | | | | | | | | | | | | | |

WHY CHOOSE US

OUR HONORS

Over **95%** High Precision Qualification Rate

30% Lower Vibration & Noise Level

50% Longer Service Life

100% Full Inspection For Every Bearing

Precision

Low Noise

High Speed

**Long Service
Life**

OEM&ODM

We focus on the field of precision micro bearings, providing customers with highly reliable transmission solutions with professional technology and stable quality.

The team has been deeply involved in the bearing industry for many years and is proficient in core technologies such as the precision grades, dimensional tolerances, material selection, and working condition adaptation of micro bearings. It can precisely match the demands of high-end scenarios such as instruments and equipment, precision machinery, and electronic manufacturing, providing professional technical support from parameter design to practical application.

We strictly control every quality checkpoint, focusing on high-precision, low-noise, long-life and high-stability products to ensure the stable operation of bearings in high-speed, precise and harsh environments. With a deep understanding of the industry and mature technical experience, we can respond quickly to demands, optimize solutions, and control costs, providing you with professional, efficient and reliable one-stop supporting services, and be your long-term reliable technical and product partner.

CERTIFICATIONS



INDUSTRY APPLICATION



Consumer Electronic




Smart Home Series



Office Automatic



Medical Equipment

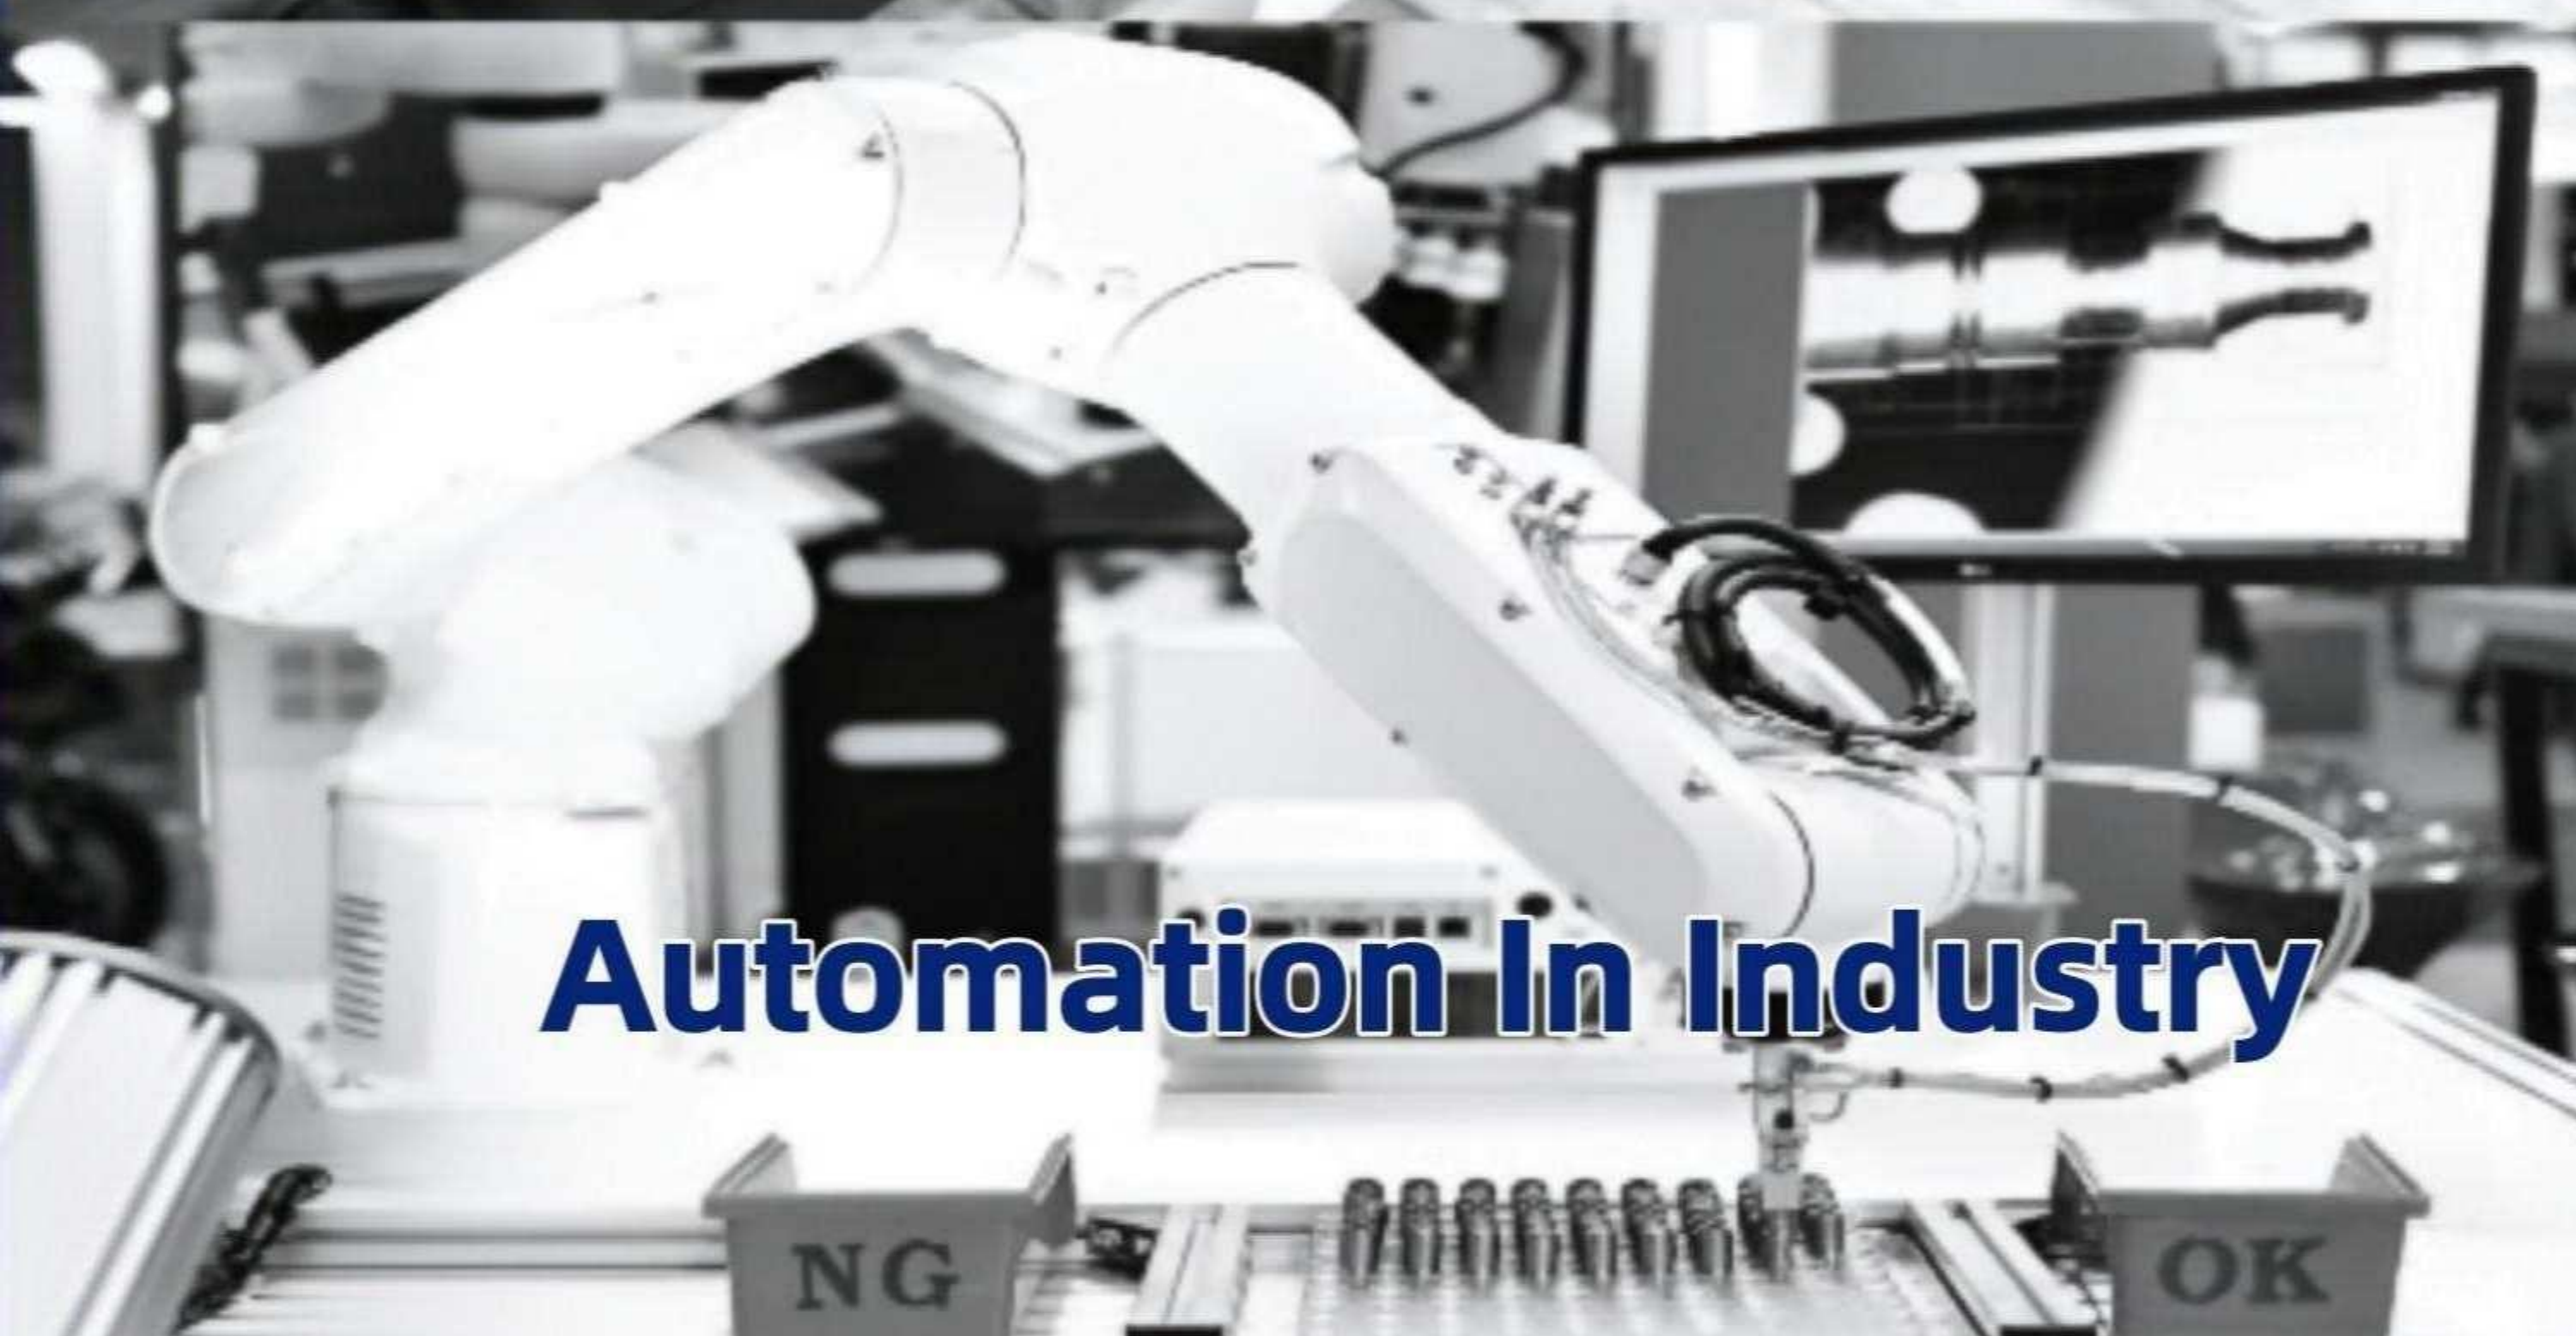

Automation in Industry



Automotive Electronics



Precise Instrument



Electric Tool

We mainly supply miniature precision deep groove ball bearings with inner diameter 1-20mm, outer diameter 3-60mm.

Our bearings feature high precision, low noise, high speed and long service life. Non-standard bearings can be customized according to customer requirements.

Main Models:

- 60 Series: 602 ~ 609
- 62 Series: 623 ~ 629
- 63 Series: 632 ~ 639
- 68 Series: 681 ~ 689
- 69 Series: 692 ~ 699



Nova Bearing - Your trusted precision partner.

PRODUCING WORKSHOP



TEST FACILITIES

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| Linner Hole Measuring Instrument | Automatic Detector | Cleance Measuring | Outside Diameter | Concentricity Tester |
|  |  |  |  |  |
| CNC Turning Machine | Roundness Measuring Instrument | Salt Spary Test Machine | Rockwell Hardness Tester | Vibration Measuring Inspection |

BEARING PRODUCTION PROCESS

Precision by process, trust by quality.

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| Rough Maching | Automatic Grinding | Ultra-precision Maching | Ring Cleaing | Assembly |
|  |  |  |  |  |
| Greasing | pressing Seals | Noise Vibration Check | Quality inspection | Packing |